


Metal Grey & Purple

# Prism

Vibrant cut pile carpet tile

# Prism

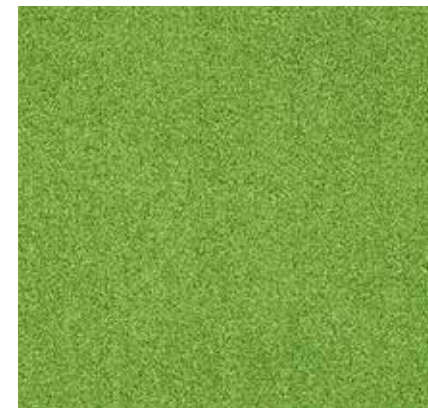

Lime Green LRV 17.0



Blue Shadow LRV 11.0



Blue Orchid LRV 7.0



Willow Green LRV 14.0



Blue Mist LRV 9.0




Blue Ice LRV 10.0



Frost Green LRV 8.0



Aqua LRV 8.0

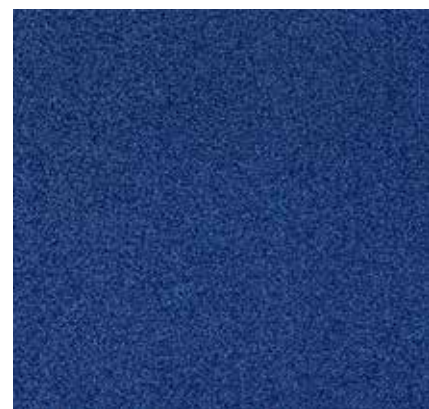

Deep Blue LRV 6.0




Forest Green LRV 4.0



Green Light LRV 10.0



Bay Blue LRV 6.0

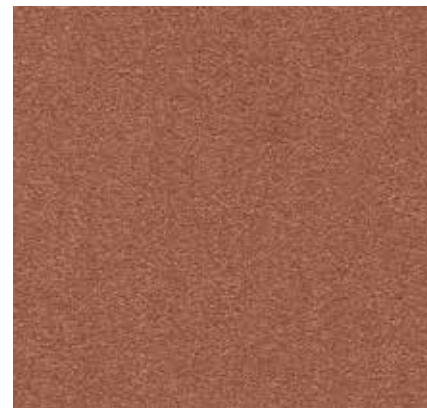

Golden Tan LRV 22.0




Pink Coral LRV 15.0



Grapefruit LRV 8.0



Denim Blue LRV 6.0

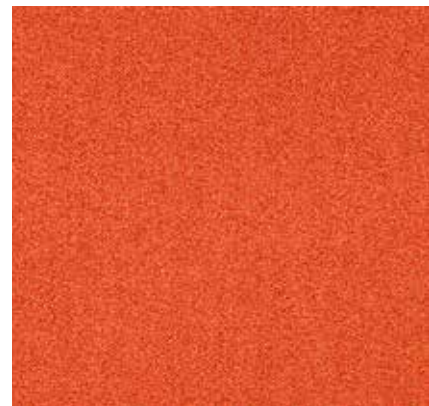

Deep Orange LRV 15.0



Gorgeous Red LRV 5.0



Oxford Blue LRV 3.0



Pink Rose LRV 7.0



Purple LRV 4.0



Sea Navy LRV 3.0



Burgundy LRV 3.0




Deep Purple LRV 3.0

# Vibrant cut pile carpet tile



Natural Beige LRV 19.0

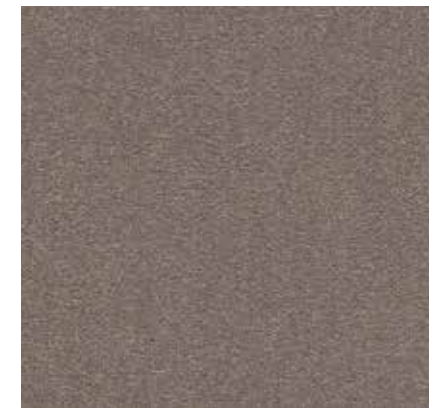

Puritan Beige LRV 20.0



Metal Grey LRV 10.0



Gold LRV 19.0



Tan LRV 9.0



Grey Marsh Wood LRV 5.0



Yellow Gold LRV 22.0




Bark LRV 6.0



Lead LRV 3.0



Natural Brown LRV 7.0

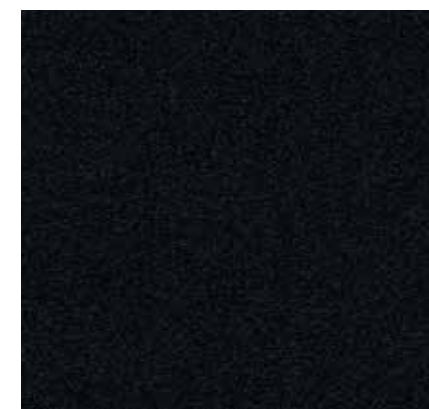

Raven LRV 2.0

# Prism Specification

## COMPOSITION

Construction	ISO2424	Tufted 1/10th Cut Pile
Pile Fibre	ISO2076	Antron 100% PA6.6 Nylon
Primary Backing	ISO2424	Non-woven Polyester
Secondary Backing	ISO2424	Bitumen with glass fibre 3kg/m <sup>2</sup>
Pile Height	ISO1766	5.0 mm ± 0.5mm
Total Height	ISO1765	8.0 mm ± 0.5mm
Pile Weight	ISO1958	1050 gr/m <sup>2</sup> ± 5%
Total Weight	ISO8543	4650 gr/m <sup>2</sup> ± 10%
Pile Density	ISO1763	181,102 tufts/m <sup>2</sup> ± 5%
Tile Size	EN994	50 x 50 cm
Tiles per Box		20 tiles per box (5m <sup>2</sup> )

## CLASSIFICATION

Flammability (Fire Spread EN13501)	ISO11925	Fs ≤ 150mm within 20 seconds
Flammability (Radiant Panel EN13501)	ISO9239	Bfl-S1
Flammability (Hot Metal Nut)	BS4790	Low radius effects of ignition
Wear Resistance (Castor Chair Test)	ISO4918	Pass ≥ 2.4 (A – Continuous Use)
Electrical Vertical Resistance	ISO10965	Pass ≤ 10 <sup>9</sup> Ω
Electrostatic Propensity (Stroll Test)	ISO6356	Pass <2.0kV
Slip Resistance	EN13893	DS
Dimensional Stability	EN986	Pass <0.2%
Acoustic Impact Noise Reduction	ISO717	28dB
Sound Absorption	ISO354	500Hz-0.09as, 1000Hz-0.27as, 2000Hz-0.38as, 4000Hz-0.51as
Colour Fastness – Light (CIELAB)	ISO105	≥5
Colour Fastness – Rubbing (CIELAB)	ISO105	≥4
Colour Fastness – Water (CIELAB)	ISO105	≥4
Classification for Use	ISO10874	Class 32 Commercial General
Luxury Class Rating	EN1307	LC3


## ENVIRONMENTAL

BREEAM A Rating

## WARRANTY

10 Year Wear Warranty

## CERTIFICATION

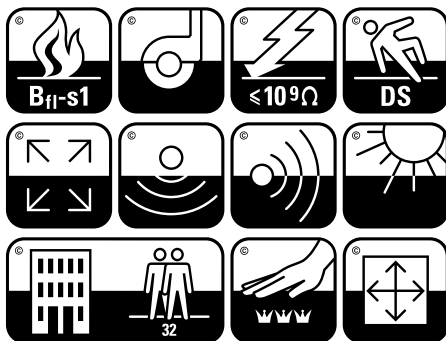

## INSTALLATION

